

/ Perfect Welding / Solar Energy / Perfect Charging



ACCUPOCKET 150/400

Arc stability without a power supply




ARC STABILITY WITHOUT A GRID CONNECTION? NO PROBLEM!


What will the conditions be like when welding on site? Will the grid connection there be sufficient for the power source? Thanks to AccuPocket, these concerns will now be a thing of the past. With its battery mode, AccuPocket offers you a welding process that is completely independent from the grid. With conventional solutions, costly grid leads or a heavy, noisy generator are often required at the welding site – neither of which constitute ideal conditions for a welder. This is where AccuPocket can help.

What's your
welding challenge?

Let's get connected.

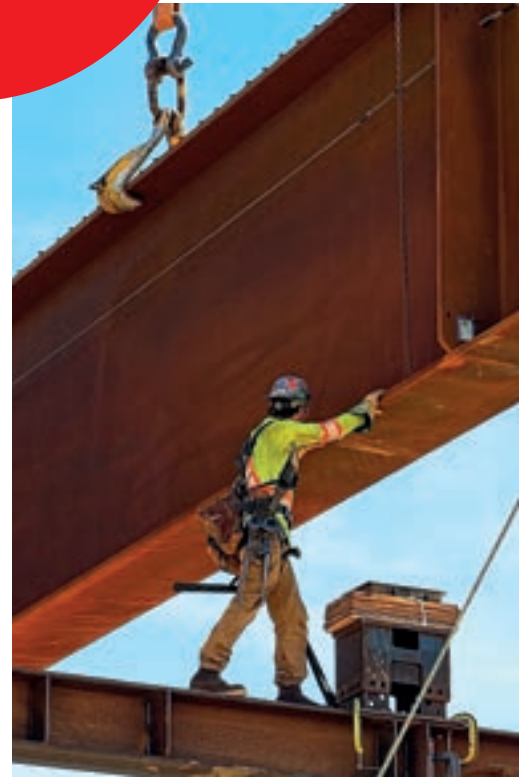

ADVANTAGES OF THE ACCUPOCKET

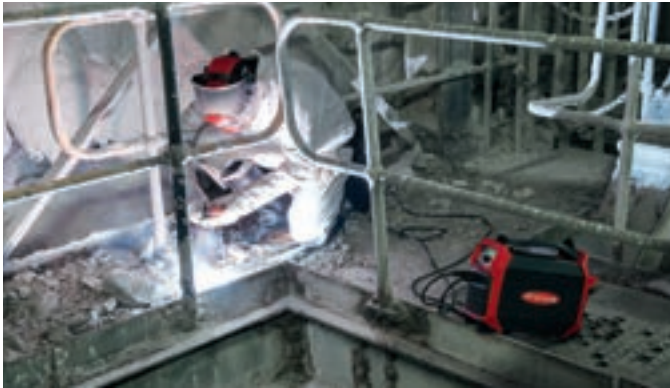

THREE DIFFERENT OPERATING MODES

- / Up to 18 electrodes (2.5 mm) with a battery charging in battery mode
- / Generator-powered operation (2 kVA is sufficient)
- / Stable arc for simultaneous charging and welding in hybrid mode

MOBILE AND ROBUST

- / Integrated battery
- / 11 kg overall weight (without charger)
- / Robust design for use in challenging conditions
- / TIG version with additional functions available



INCREASED ARC STABILITY THANKS TO BATTERY TECHNOLOGY

- / Easy electrode ignition due to high short-circuit currents
- / Welding voltage independent of state of charge, no arc break
- / Rutile, basic, CEL and special electrodes
- / 6 x 3.25 mm or 18 x 2.5 mm electrodes for full battery charging or 130 cm TIG weld seam at 150 A

SAFE, HIGH-POWER BATTERY MEETS WELDING TECHNOLOGY

- / LiFePo₄, 400 Wh
- / No Memory Effect
- / Low self discharge
- / Voltage monitoring for all battery cells
- / Protection from overcharging, deep discharge and overheating
- / Rapid charging in 30 minutes (80% performance)



TECHNICAL DATA

	AccuPocket	Active Charger 1000/230	Active Charger 1000/120
Nominal voltage of rechargeable battery	52.8 V	- 230 V AC, ±15%	- 120 V AC, ±5%
Charging current during normal charging	10 A	50/60 Hz	
Charging current during rapid charging	18 A	max. 9.5 A eff.	max. 16 A eff.
Battery capacity	396 Wh	max. 16 A	max. 20 A
Battery type	Lithium ion	max. 95%	max. 93.5%
Welding current range		max. 1100 W	
Electrode DC	10–140 A	max. 2.4 W	max. 1.7 W
TIG DC	3–150 A	I (with ground conductor)	
Welding current in hybrid mode		None	
Manual metal arc welding at 40°C (104°F)	18% DC, 140 A 25% DC, 100 A 100% DC, 40 A	Max. approved grid impedance at the interface (PCC) with the public grid	A
Welding current in hybrid mode		EMC device class	CE
TIG welding at 40°C (104°F)	25% DC, 150 A 50% DC, 100 A 100% DC, 65 A	Marks of conformity	30–58 V DC
Open circuit voltage	90 V	Output voltage	Max. 18 A DC
Reduced open circuit voltage	15 V	Output current	max. 1040 W
Degree of protection	IP 23	Output power	max. 1025 W
Type of cooling	AF	Cooling	Convection and fan
Marks of conformity	CE, S	Dimensions l/w/h	270 x 168 x 100 mm
Dimensions l/w/h	435 x 160 x 310 mm	Weight (without cable)	approx. 2 kg
		Degree of protection	IP43S
		Overvoltage category	II
		Device is only permitted to be operated on grids that are grounded at the neutral point.	

/ Perfect Welding / Solar Energy / Perfect Charging

THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 4,550 employees worldwide and 1,241 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

v09 May 2018 EN

Fronius India Private Limited
GAT no 312, Nanekarwadi
Chakan, Taluka - Khed District
Pune 410501
India
Telephone + 91 98 20 60 52 07
sales.india@fronius.com
www.fronius.in

Fronius (Thailand) Ltd.
Pinthong Industrial Estate I
789/193 Moo 1, Sriracha,
Chonburi 20230
Building: P17/B1
Thailand
sales.Thailand@fronius.com
www.fronius.co.th

Fronius Middle East FZE
P.O. Box: 263241
Jebel Ali / JAFZA ONE BUILDING
Dubai / U.A.E
Telephone +971 (0) 56 499 8224
contact.middleeast@fronius.com
www.fronius.ae/pw

Fronius Canada Ltd.
2875 Argentia Road, Units 4,5 & 6
Mississauga, ON L5N 8G6
Canada
Telephone +1 905 288-2100
Fax +1 905 288-2101
sales.canada@fronius.com
www.fronius.ca

Fronius USA LLC
6797 Fronius Drive
Portage, IN 46368
USA
Telephone +1 877 FRONIUS
sales.usa@fronius.com
www.fronius-usa.com

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
Telephone +44 1908 512 300
Fax +44 1908 512 329
info-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
Telephone +43 7242 241-0
Fax +43 7242 241-953940
sales@fronius.com
www.fronius.com